

MODELS	LIFTING MOMENT	HORIZ. EXTENSION	MAX BEACH LIFTING CAPACITY	SLEWING ANGLE	WEIGHT	PRESSURE	DIMENSIONS WxHxD
	tm	m	kg	°	kg	bar	mm
726 A1	21.4	6.40	3345	400	2620	325	2520x2390x1005
726 A2	-	8.31	2510	400	2770	325	2520x2390x1005
726 A3	-	10.29	1915	400	2920	325	2520x2390x1020
726 A4	-	12.22	1490	400	3040	325	2520x2390x1020
726 A5	-	14.31	1160	400	3200	325	2520x2390x1020
726 A6	-	16.40	890	400	3290	325	2520x2390x1020
726 A7	-	18.50	660	400	3410	325	2520x2390x1100
726 A8	-	20.60	495	400	3500	325	2520x2390x1100
726 A6j2	-	18.60	495	400	3570	325	2520x2670x1140
726 A4j3	-	20.40	372	400	3660	325	2520x2670x1140
726 A6j2	-	21.95	415	400	3650	325	2520x2545x1140
SC726 A2	20.3	6.51	3120	400	2700	325	2520x2390x1005
SC726 A3	-	8.49	2300	400	2850	325	2520x2390x1020
SC726 A4	-	10.42	1750	400	2990	325	2520x2390x1020
SC726 A5	-	12.51	1350	400	3110	325	2520x2390x1020
SC726 A6	-	14.60	1000	400	3230	325	2520x2390x1020
729 A2	27.3	8.15	3225	425	3305	325	2500x2360x1070
729 A3	-	10.15	2440	425	3465	325	2500x2360x1070
729 A4	-	12.10	1905	425	3620	325	2500x2360x1070
729 A5	-	14.28	1485	425	3760	325	2500x2360x1070
729 A6	-	16.47	1160	425	3885	325	2500x2360x1070
729 A7	-	18.74	900	425	4000	325	2500x2360x1170
729 A8	-	21.04	710	425	4100	325	2500x2360x1170
729 A6j4	-	27.50	320	425	4435	325	2500x2710x1160
732 A1	31.2	5.85	5340	397	3590	300	2500x2355x1170
732 A2	-	7.70	3850	397	3820	300	2500x2355x1170
732 A3	-	9.70	2870	397	4040	300	2500x2355x1170
732 A4	-	11.80	2180	397	4270	300	2500x2355x1170
732 A5	-	14.10	1670	397	4440	300	2500x2355x1170
732 A6	-	16.40	1290	397	4600	300	2500x2405x1170
732 A7	-	18.75	1000	397	4720	300	2500x2490x1220
732 A8	-	21.05	790	397	4840	300	2530x2550x1300
732 A4j4	-	21.70	605	397	5110	290	2535x2620x1330
732 A5j4	-	23.90	425	397	5280	290	2545x2620x1330
SC732 A2	30.3	6.21	4875	397	3820	300	2500x2355x1170
SC732 A3	-	8.22	3540	397	4040	300	2500x2355x1170
SC732 A4	-	10.30	2625	397	4270	300	2500x2355x1170
SC732 A5	-	12.60	2015	397	4440	300	2500x2355x1170
SC732 A6	-	14.90	1550	397	4600	300	2500x2405x1170
SC732 A7	-	17.20	1055	397	4720	300	2500x2490x1220
SC732 A8	-	19.50	800	397	4840	300	2530x2550x1300
736 A1	32.4	5.85	5540	397	3590	310	2500x2355x1170
736 A2	-	7.70	4030	397	3820	310	2500x2355x1170
736 A3	-	9.70	3040	397	4040	310	2500x2355x1170
736 A4	-	11.80	2340	397	4270	310	2500x2355x1170
736 A5	-	14.10	1810	397	4440	310	2500x2355x1170
736 A6	-	16.40	1420	397	4600	310	2500x2405x1170
736 A7	-	18.75	1120	397	4720	310	2500x2490x1220
736 A8	-	21.05	890	397	4840	310	2530x2550x1300
736 A4j4	-	21.70	705	397	5110	310	2535x2620x1330
736 A5j4	-	23.90	475	397	5280	310	2545x2620x1330
SC736 A2	31.0	6.21	5060	397	3820	310	2500x2355x1170
SC736 A3	-	8.22	3710	397	4040	310	2500x2355x1170
SC736 A4	-	10.30	2775	397	4270	310	2500x2355x1170
SC736 A5	-	12.60	2165	397	4440	310	2500x2355x1170
SC736 A6	-	14.90	1680	397	4600	310	2500x2405x1170
SC736 A7	-	17.20	1125	397	4720	310	2500x2490x1220
SC736 A8	-	19.50	880	397	4840	310	2530x2550x1300
745 A1	45.1	6.80	7520	400	4280	305	2505x2460x1250
745 A2	-	7.85	5515	400	4540	305	2505x2460x1275
745 A3	-	9.90	4180	400	4790	305	2505x2460x1275
745 A4	-	11.90	3245	400	5070	305	2505x2460x1275
745 A5	-	14.00	2545	400	5310	305	2505x2460x1285
745 A6	-	16.10	2025	400	5510	305	2505x2460x1285
745 A7	-	18.30	1595	400	5700	305	2505x2460x1400
745 A8	-	20.50	1255	400	5880	305	2510x2480x1400
746R A2	43.4	7.85	5515	400	4540	300	2505x2460x1275
746R A3	-	9.90	4180	400	4790	300	2505x2460x1275
746R A4	-	11.90	3245	400	5070	300	2505x2460x1275
746R A5	-	14.00	2545	400	5310	300	2505x2460x1285
746R A6	-	16.10	2025	400	5510	300	2505x2460x1285
746R A7	-	18.30	1595	400	5700	300	2505x2460x1400
746R A8	-	20.50	1255	400	5880	300	2510x2480x1400
746R A6j4	-	25.90	570	400	6380	300	2515x2725x1470
749R A2	44.7	7.85	5700	400	4580	315	2505x2460x1275
749R A3	-	9.90	4370	400	4830	315	2505x2460x1275
749R A4	-	11.90	3430	400	5110	315	2505x2460x1275
749R A5	-	14.00	2720	400	5350	315	2505x2460x1285
749R A6	-	16.10	2180	400	5550	315	2505x2460x1285
749R A7	-	18.30	1740	400	5740	315	2505x2460x1400
749R A8	-	20.50	1380	400	5920	315	2510x2480x1400
749R A6j4	-	25.90	655	400	6420	315	2515x2725x1470

745: For non-CE markets only



1) The applications shown must be evaluated on a case-by-case basis to establish compliance with standards.



700




Data, descriptions, and illustrations apply only and uniquely to models. At the time of printing of this brochure, the information is largely indicative and is binding upon F.lli Ferrari. Future modifications are subject to the discretion of F.lli Ferrari and are always in compliance with applicable and pertinent safety standards. To obtain updated data, descriptions, and illustrations, consult the manufacturer or your reseller. Contents manufactured and/or marketed by F.lli Ferrari.



F.lli FERRARI CORPORATION S.p.A.

Via Einstein, 8
42028 Poggio (RE) Italy
Tel. +39 0522/486308
Fax +39 0522/486330
info@fliferrari.it
marketing@fliferrari.it
www.fliferrari.com

M.K.T. 5800311. Date of printing: 01/07/14.

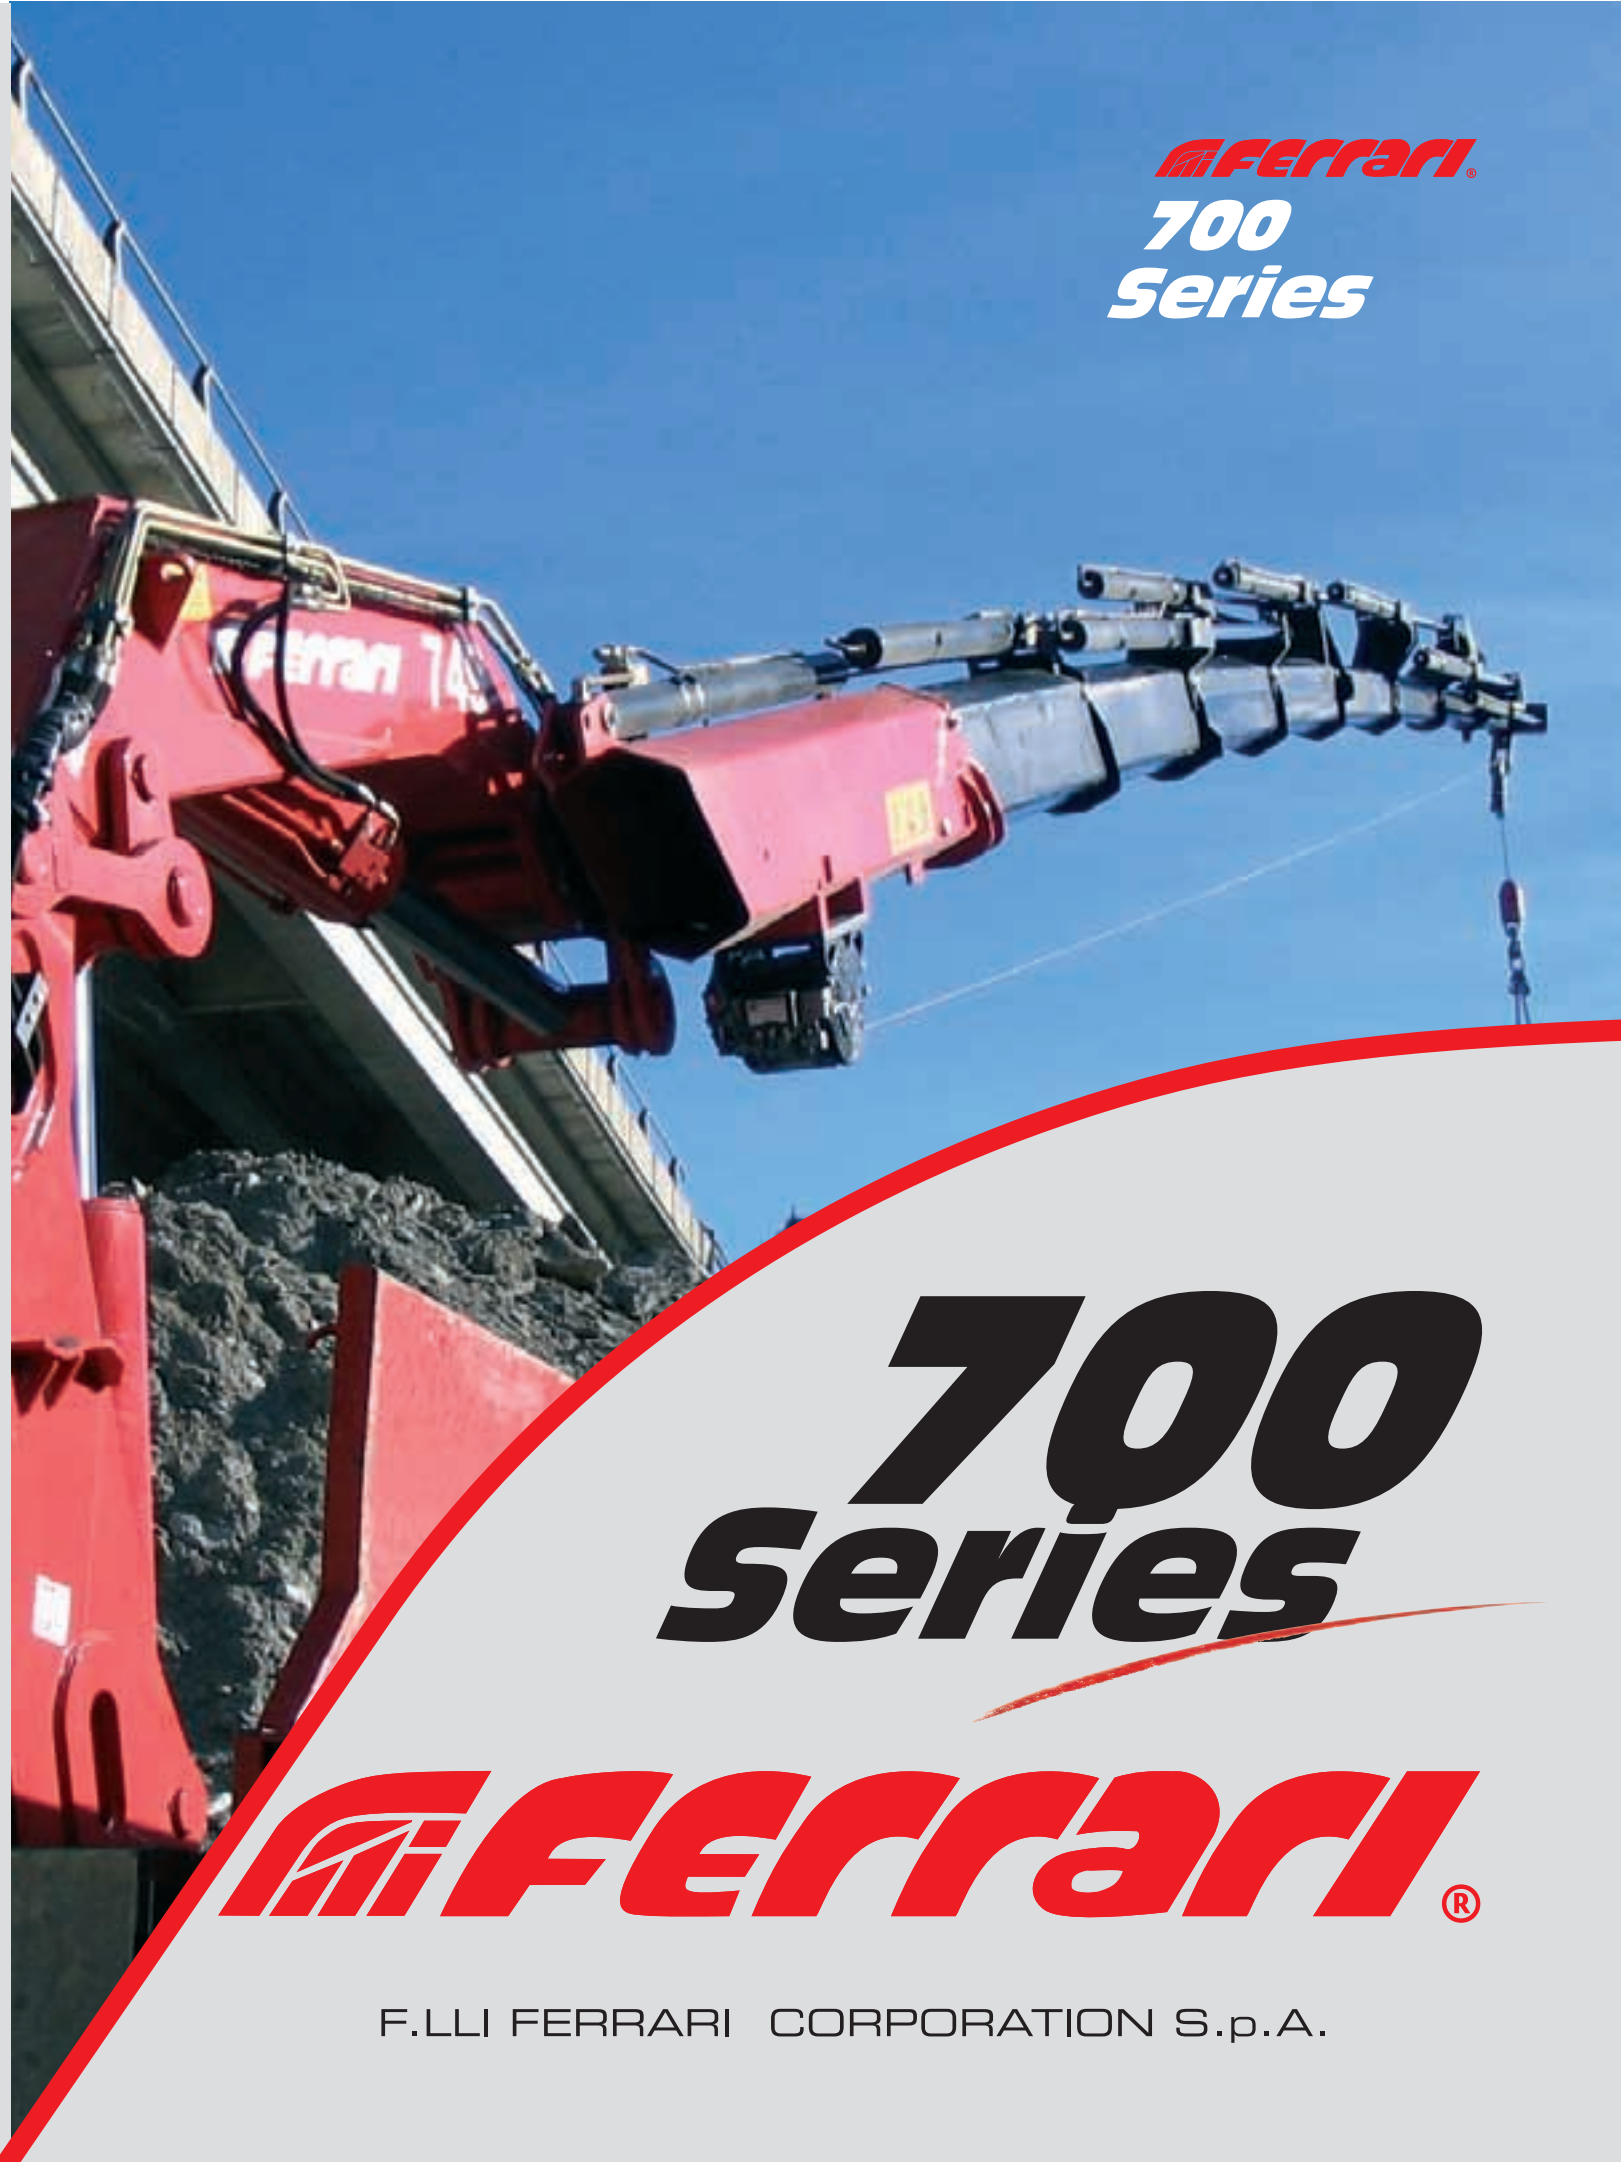

700 Series

700 Series


F.LLI FERRARI CORPORATION S.p.A.

700 Series



**RED POWER,
TWICE THE POWER***

STANDARD RED POWER

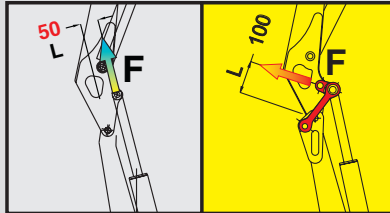

POWER 50% POWER 100%

"Red Power" means more leverage to the crane booms. This leverage is achieved through an articulating connecting rod system.



*) In vertical position

RED POWER



This device shows the load at the hook on a display placed near the controls, making safe the use of the mechanical extensions following the European Standard EN12999. In case of a CE crane with mechanical extensions it is mandatory to mount the RLC device.

RADIO REMOTE CONTROL (R Version)

The operator can control the crane with high precision proportional levers in every position and, doing so, can supervise the loading and unloading operations. That means a great time saving and higher safety.

All F.I.R.I. FERRARI CORPORATION remote controls have an identification code and are shielded from electromagnetic fields and from external radio signals.



CAN-bus
Only CE version



(Optional)



(Radiocontrol)



(Optional)



ECM4



(Radiocontrol)

MODELS	LIFTING MOMENT tm	HORIZ. EXTENSION m	MAX REACH LIFTING CAPACITY kg	SLEWING ANGLE °	WEIGHT kg	PRESSURE bar	DIMENSIONS WxHxD mm
710 A1	9.94	5.73	1670	403	1315	250	2290x2230x670
710 A2	-	7.62	1200	403	1410	250	2290x2230x670
710 A3	-	9.51	875	403	1500	250	2300x2230x670
710 A4	-	11.40	610	403	1590	235	2300x2230x750
710 A3J2	-	14.41	350	403	1720	245	2300x2230x820
SC710 A1	9.33	4.23	2230	403	1280	240	2290x2230x670
SC710 A2	-	6.12	1490	403	1375	240	2290x2230x670
SC710 A3	-	8.00	1070	403	1465	240	2315x2230x670
SC710 A4	-	9.87	670	403	1555	210	2315x2230x750
712 A2	11.7	8.32	1250	403	1700	265	2490x2280x750
712 A3	-	10.41	880	403	1815	265	2490x2280x750
712 A4	-	12.54	650	403	1930	265	2490x2280x750
712 A5	-	14.64	470	403	2015	265	2490x2280x835
712 A4J2	-	17.53	290	403	2160	265	2490x2300x940
SC712 A1	11.9	4.41	2715	403	1465	260	2500x2280x750
SC712 A2	-	6.45	1770	403	1605	260	2500x2280x750
SC712 A3	-	8.53	1235	403	1720	255	2500x2280x750
SC712 A4	-	10.67	875	403	1835	250	2500x2280x750
SC712 A5	-	12.76	580	403	1920	235	2500x2280x835
714 A1	14.0	6.29	2215	403	1560	295	2490x2280x750
714 A2	-	8.33	1560	403	1700	295	2490x2280x750
714 A3	-	10.41	1140	403	1815	295	2490x2280x750
714 A4	-	12.55	850	403	1930	295	2490x2280x750
714 A5	-	14.64	640	403	2015	305	2490x2280x835
714 A4J2	-	17.47	355	403	2160	305	2490x2300x940
717 A1	15.3	6.20	2475	400	2070	290	2500x2300x915
717 A2	-	8.25	1715	400	2215	290	2500x2300x915
717 A3	-	10.29	1240	400	2350	290	2500x2300x915
717 A4	-	12.38	920	400	2475	290	2500x2300x915
717 A5	-	14.52	680	400	2585	290	2500x2300x1020
717 A6	-	16.60	510	400	2675	290	2500x2300x1020
717 A3J2	-	17.74	390	400	2810	290	2500x2400x1100
717 A4J2	-	18.18	320	400	2890	290	2510x2450x1100
717 A4J3	-	19.86	240	400	2945	290	2510x2450x1100
719R A1	16.0	6.20	2575	400	2070	310	2500x2300x915
719R A2	-	8.25	1800	400	2215	310	2500x2300x915
719R A3	-	10.29	1310	400	2350	310	2500x2300x915
719R A4	-	12.38	980	400	2475	310	2500x2300x915
719R A5	-	14.52	730	400	2585	310	2500x2300x1020
719R A6	-	16.60	555	400	2675	310	2500x2300x1020
719R A3J3	-	17.76	445	400	2810	310	2500x2400x1100
719R A4J2	-	18.18	365	400	2890	310	2510x2450x1100
719R A4J3	-	19.86	280	400	2945	310	2510x2450x1100
721 A1	19.2	6.40	3000	400	2450	290	2520x2300x1040
721 A2	-	8.31	2150	400	2600	290	2520x2300x1040
721 A3	-	10.29	1600	400	2750	290	2520x2300x1040
721 A4	-	12.22	1220	400	2890	290	2520x2300x1040
721 A5	-	14.31	925	400	3010	290	2520x2300x1040
721 A6	-	16.40	700	400	3130	290	2520x2300x1040
721 A7	-	18.50	520	400	3230	290	2520x2300x1100
721 A8	-	20.60	375	400	3320	290	2520x2300x1100
721 A4J2	-	20.40	300	400	3490	290	2520x2300x1150
721 A6J2	-	21.95	305	400	3430	290	2520x2450x1150
SC721 A2	19.0	6.41	2880	400	2550	290	2520x2300x1035
SC721 A3	-	8.39	2070	400	2700	290	2520x2300x1035
SC721 A4	-	10.33	1545	400	2815	290	2520x2300x1035
SC721 A5	-	12.41	1170	400	2960	290	2520x2300x1035
SC721 A6	-	14.50	900	400	3060	290	2520x2300x1035
723R A1	19.8	6.40	3100	400	2450	300	2520x2300x1040
723R A2	-	8.31	2250	400	2600	300	2520x2300x1040
723R A3	-	10.29	1685	400	2750	300	2520x2300x1040
723R A4	-	12.22	1300	400	2890	300	2520x2300x1040
723R A5	-	14.31	995	400	3010	300	2520x2300x1040
723R A6	-	16.40	760	400	3130	300	2520x2300x1040
723R A7	-	18.50	565	400	3230	300	2520x2300x1100
723R A8	-	20.60	405	400	3320	300	2520x2300x1100
723R A4J3	-	20.40	325	400	3490	300	2520x2300x1150
723R A6J2	-	21.95	330	400	3430	300	2520x2450x1150
SC723R A2	19.3	6.41	2975	400	2550	300	2520x2300x1035
SC723R A3	-	8.39	2150	400	2700	300	2520x2300x1035
SC723R A4	-	10.33	1620	400	2815	300	2520x2300x1035
SC723R A5	-	12.41	1240	400	2960	300	2520x2300x1035
SC723R A6	-	14.50	965	400	3060	300	2520x2300x1035

1) The applications shown must be evaluated on a case-by-case basis to establish compliance with standards.

